

客户确认  
签章处

| Rev. | ECN Number | Description | Date |
|------|------------|-------------|------|
|      |            |             |      |
|      |            |             |      |

NOTE(技术要求):

1.Material(材质):

plunger(针头): Brass C3604(黄铜C3604)

Barrel(针管): Brass C3604(黄铜C3604)

Spring(弹簧): SUS 304(不锈钢304)

2.Plating(电镀);

Plunger: 1u"Au over 50-120u"Ni(针头: 镀金 1u", 镍底 50-120u")

Barrel : 1u"Au over 50-120u"Ni(针管: 镀金 1u", 镍底 50-120u")

3.Electrical(电气特性);

Rated Current & Voltage:DC 12V;1.0A(额定电压&电流:直流 12V,1.0A)

Contact Resistance: 100mohm Max. at working height.

接触电阻: 最大 100毫欧 (在工作高度状态下) ;

4: WorkTemperture(工作环境)

Withstanding Higt Temperature:260°C (工作最高温度:260°C)

Operational Temperature:-40 85°C (工作温度:-40 85°C)

5: Mechanical(机械性能):



Force: 80±10gf at working height.( 80±10gf 在工作高度时)

Working Height:0.7mm (工作高度: 0.7mm )

Durability: 20000 cycles(min) (寿命: 20000 次)


6: 24hours delay test.( 24 小时盐雾测试)

7: 标有"▼"尺寸为重点管控尺寸,未注倒角均为C0.05mm ,未注尺寸公差均为±0.03mm.

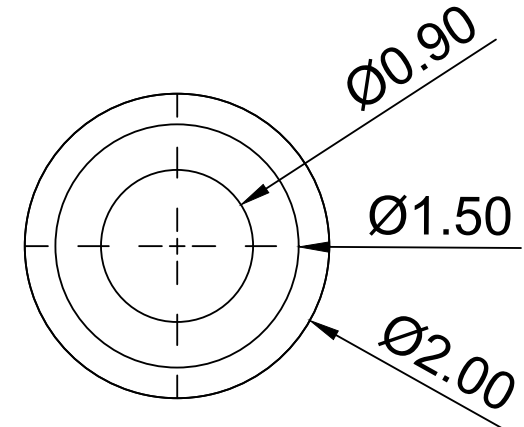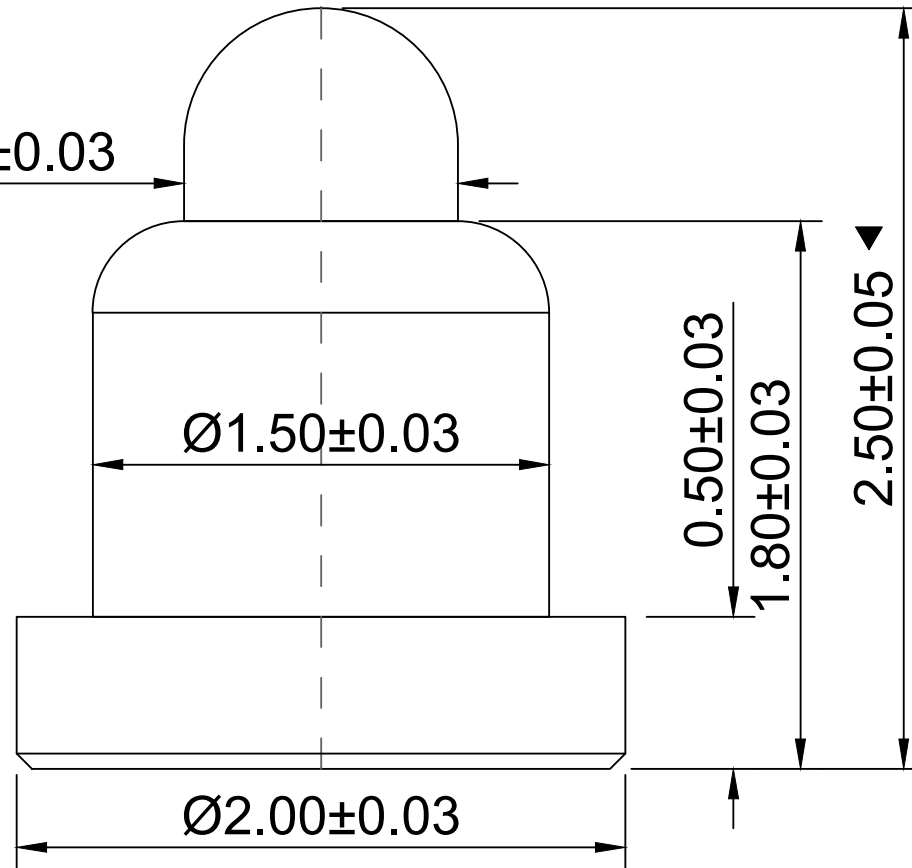

**TBDZ**

深圳市探犇电子科技有限公司  
ShenZhen TBDZ Technology CO., LTD

| GENERAL TOLERANCE |                                                                                     |
|-------------------|-------------------------------------------------------------------------------------|
| XX. $\pm 0.50$    |  |
| X. $\pm 0.35$     | X.° $\pm 2.0^\circ$                                                                 |
| .X $\pm 0.25$     | .X° $\pm 1.0^\circ$                                                                 |
| .XX $\pm 0.15$    | .XX° $\pm 0.5^\circ$                                                                |

SCALE:


1:1

UNIT:

mm

SIZE:

A4



DRAWN  
TB-01

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

TB-PD01-0202A

PARTS NO.(INTENDED USE)

TB0202A

TITLE

客户图

POGOPIN;SMT贴片式,  
PG2.0-2.50

REV.

A

SHEET

1/1