

客户确认
签章处

Rev.	ECN Number	Description	Date

NOTE(技术要求):

1.Material (材质):

Plunger (针头): Brass C3604 (黄铜C3604)

Barrel (针管): Brass C3604 (黄铜C3604)

Spring (弹簧): SUS 304 (不锈钢304)

2.Plating (电镀):

Plunger: 1u" Au over 50-120u"(针头: 镀金1u",镍底20-120u")

Barrel: 1u" Au over 50-120u"(针管: 镀金1u",镍底20-120u")

3.Electrical (电气特性):

Rated Current & Voltage: DC 12V;1.0A(额定电压&电流: 直流12V,1.0A)

Contact Resistance:100mohm Mac,at working height.

接触电阻: 最大100毫欧 (在工作状态下) .

4.Worktemperture(工作环境):

Withstanding Higt Temperature :260° C (工作最高温度:260° C)

Operational Temperature:-40 85° C (工作温度:-40 85° C)



5.Mechanical(机械性能):

Force: 80±20%gf at working height. (80±20%gf 在工作高度时)

Working Height:0.7mm (工作高度: 0.7mm)

Durability: 30000 cycles(min) (寿命: 30000 次)

6.标有"▼"尺寸为重点管控尺寸,未注倒角均为C0.05mm,未注尺寸公差均为±0.03mm。

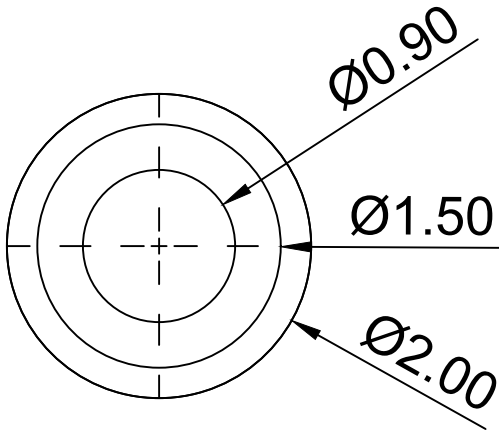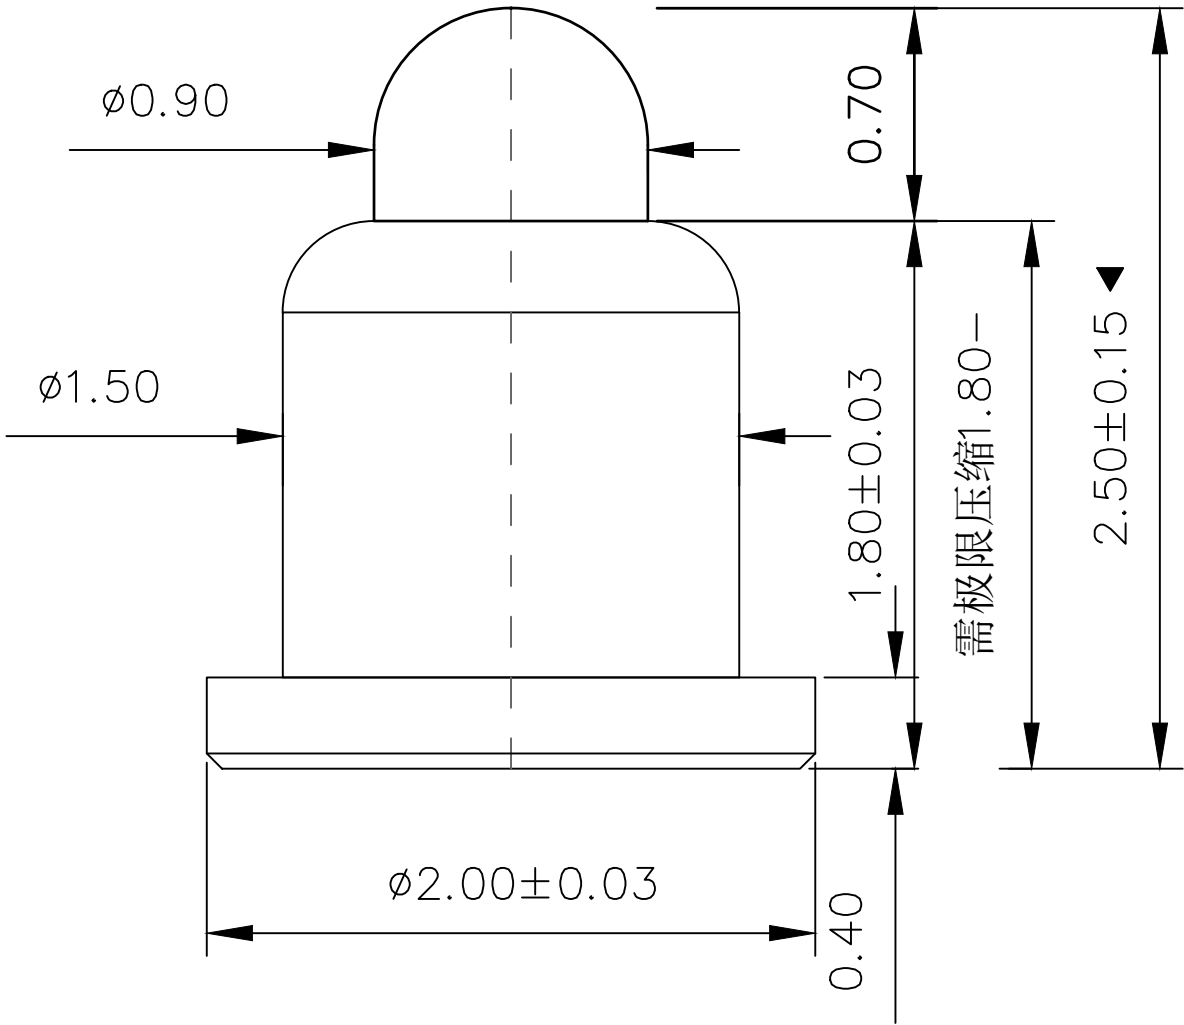

TBDZ 深圳市探犇电子科技有限公司 ShenZhen TBDZ Technology CO., LTD	GENERAL TOLERANCE		SCALE: 1:1		DRAWN TB-TYC	DATE	DWG. NO. TB026-017	TITLE 客户图	REV. A
	XX. ± 0.50		UNIT: mm		CHECK	DATE	PARTS NO.(INTENDED USE) TB11810124		POGOPIN;SMT贴片式, PG2.0-2.50
	X. ± 0.35	X.° $\pm 2.0^\circ$	SIZE: A4		APPROVE	DATE			
	.X ± 0.25	.X° $\pm 1.0^\circ$							
	.XX ± 0.15	.XX $\pm 0.5^\circ$							