

客户确认
签章处

Rev.	ECN Number	Description	Date

NOTE(技术要求):

1.Material(材质):

plunger(针头): Brass C3604(黄铜C3604)

Barrel(针管): Brass C3604(黄铜C3604)

Spring(弹簧): SUS 304(不锈钢304)

2.Plating(电镀);

Plunger: 1u"Au over 50-120u"Ni(针头: 镀金 1u", 镍底 50-120u")

Barrel : 1u"Au over 50-120u"Ni(针管: 镀金 1u", 镍底 50-120u")

3.Electrical(电气特性);

Rated Current & Voltage:DC 12V;1.0A(额定电压&电流:直流 12V,1.0A)

Contact Resistance: 100mohm Max. at working height.

接触电阻: 最大 100毫欧 (在工作高度状态下);

4: WorkTemperture(工作环境)

Withstanding Higt Temperature:260°C (工作最高温度:260°C)

Operational Temperature:-40 85°C (工作温度:-40 85°C)

5: Mechanical(机械性能):



Force: 80±10gf at working height.(80±10gf 在工作高度时)

Working Height:1.0mm (工作高度: 1.0mm)

Durability: 20000 cycles(min) (寿命: 20000 次)

6: 24hours delay test.(24 小时盐雾测试)

7: 标有"▼"尺寸为重点管控尺寸,未注倒角均为C0.05mm ,未注尺寸公差均为±0.03mm.

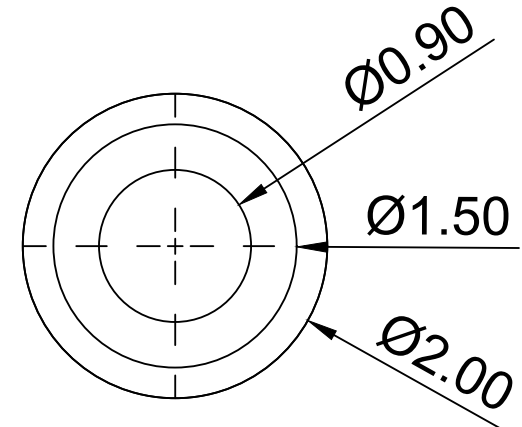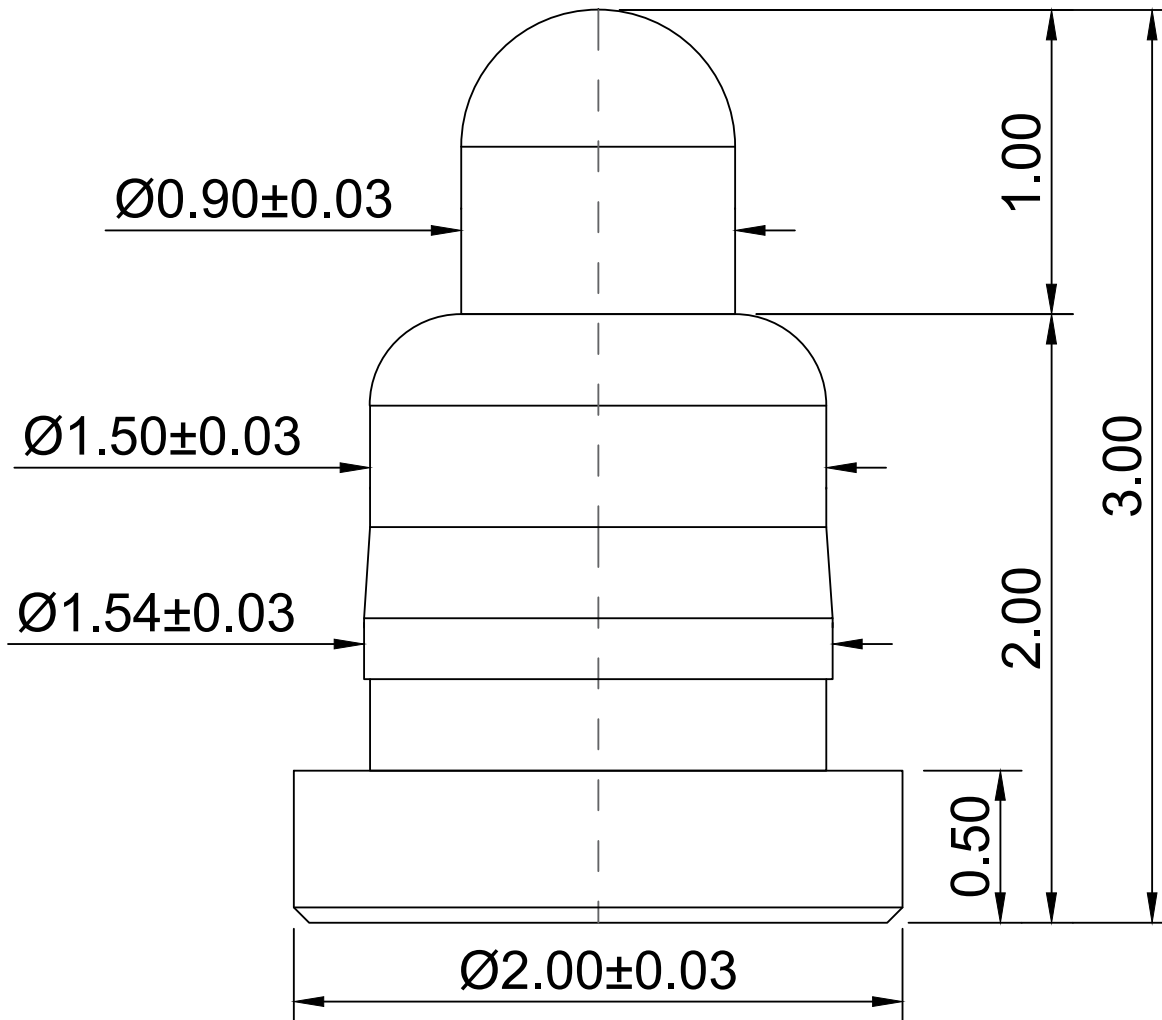

TBDZ

深圳市探犇电子科技有限公司
ShenZhen TBDZ Technology CO., LTD

GENERAL TOLERANCE	
XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.25	.X° ±1.0°
.XX ±0.15	.XX° ±0.5°

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN
TB-01

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

TB-PD01-0203A

PARTS NO.(INTENDED USE)

TB-0203A

TITLE

客户图

POGOPIN;SMT贴片式,
PG2.0-3.00

REV.

A

SHEET

1/1