

客户确认
签章处

Rev.	ECN Number	Description	Date

NOTE(技术要求):

1.Material(材质):

plunger(针头): Brass C3604(黄铜C3604)

Barrel(针管): Brass C3604(黄铜C3604)

Spring(弹簧): SUS 304(不锈钢304)

2.Plating(电镀);

Plunger: 1u"Au over 50-120u"Ni(针头: 镀金 1u", 镍底 50-120u")

Barrel : 1u"Au over 50-120u"Ni(针管: 镀金 1u", 镍底 50-120u")

3.Electrical(电气特性);

Rated Current & Voltage:DC 12V;1.0A(额定电压&电流:直流 12V,1.0A)

Contact Resistance: 100mohm Max. at working height.

接触电阻: 最大 100毫欧 (在工作高度状态下) ;

4: WorkTemperture(工作环境)

Withstanding Higt Temperature:260°C (工作最高温度:260°C)

Operational Temperature:-40 85°C (工作温度:-40 85°C)

5: Mechanical(机械性能):



Force: 80±10gf at working height.(80±10gf 在工作高度时)

Working Height:0.4mm (工作高度: 0.4mm)

Durability: 20000 cycles(min) (寿命: 20000 次)

6: 24hours delay test.(24 小时盐雾测试)

7: 标有"▼"尺寸为重点管控尺寸,未注倒角均为C0.05mm ,未注尺寸公差均为±0.03mm.

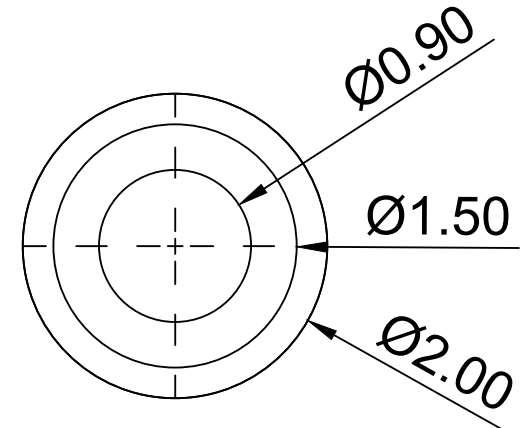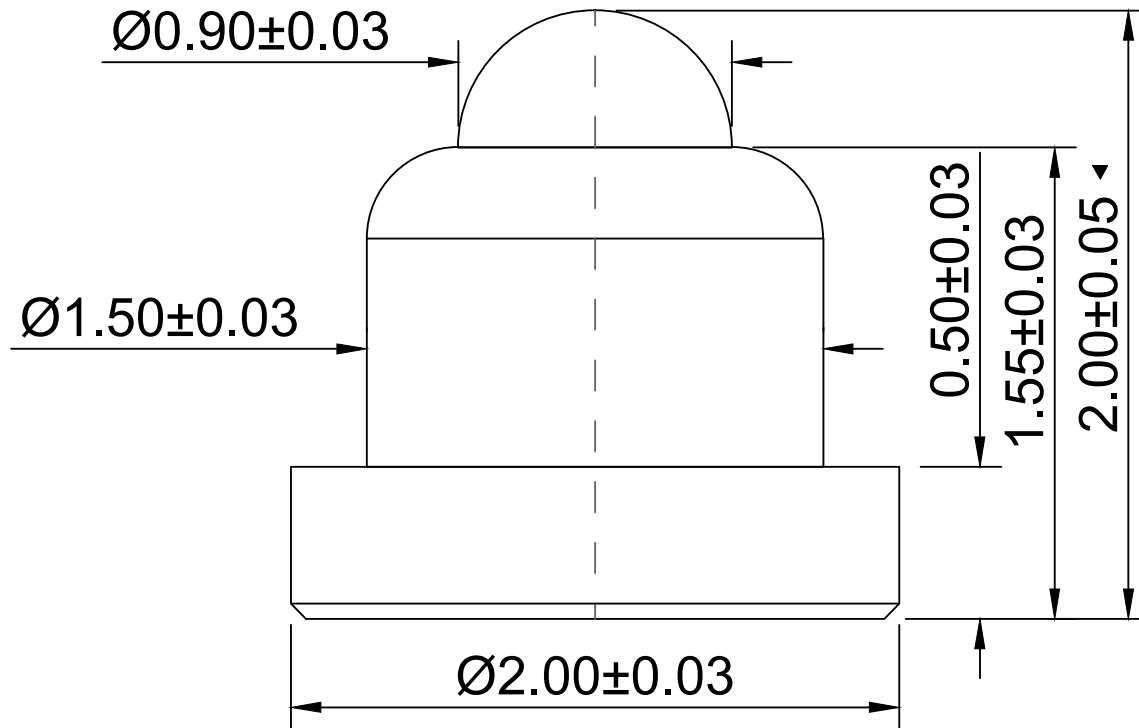

TBDZ

深圳市探犇电子科技有限公司
ShenZhen TBDZ Technology CO., LTD

GENERAL TOLERANCE		
XX. ±0.50		
X. ±0.35		
.X ±0.25		
.XX ±0.15		

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	TB-01
CHECK	
APPROVE	

DATE	
DATE	
DATE	

DWG. NO.	TB-PD01-0201A
PARTS NO.(INTENDED USE)	TB0201A

TITLE	客户图
POGOPIN;SMT贴片式, PG2.0-2.00	

REV.	A
SHEET	1/1